


Single Row Terminal Blocks

Kulka® 599 Series

150 Volts

Specifications:

Base, Phenolic, 150° C
 (JJ) GDI-30F Material is Available
 Screws, #5-40 Binder Head, Phil Slot
 Terminals, Plated Brass
 1-30 Poles
 Wire Range with Wire Binding Screw #16 - #22 Awg - 15 Amps
 The Suitability of These Devices for Greater Currents Shall Be
 Determined in the End-Use Application.
 UL Recognized File No. E47811
 CSA Certified File No. LR19766
 C€

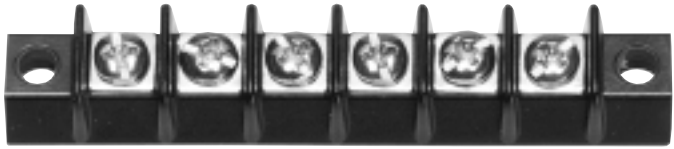

Catalog #	Dimensions		Catalog #	Dimensions	
	A	B		A	B
599 GP 01	0.75	1.03	599 GP 16	6.38	6.66
599 GP 02	1.12	1.41	599 GP 17	6.75	7.03
599 GP 03	1.50	1.78	599 GP 18	7.13	7.41
599 GP 04	1.88	2.16	599 GP 19	7.50	7.78
599 GP 05	2.25	2.53	599 GP 20	7.88	8.16
599 GP 06	2.63	2.91	599 GP 21	8.25	8.53
599 GP 07	3.00	3.28	599 GP 22	8.63	8.91
599 GP 08	3.38	3.66	599 GP 23	9.00	9.28
599 GP 09	3.75	4.03	599 GP 24	9.38	9.66
599 GP 10	4.13	4.41	599 GP 25	9.75	10.03
599 GP 11	4.50	4.78	599 GP 26	10.13	10.41
599 GP 12	4.88	5.16	599 GP 27	10.50	10.78
599 GP 13	5.25	5.53	599 GP 28	10.88	11.16
599 GP 14	5.63	5.91	599 GP 29	11.25	11.53
599 GP 15	6.00	6.28	599 GP 30	11.63	11.91

Hardware Options:

KT 28 = Full Quick Connect (0 Flat)
 KT 29 = Full Quick Connect (45 Bend)
 KT 30 = Full Quick Connect (90 Bend)
 ST = Full Solder
 J 600 = Line to Line Jumper
 3/4 ST = Half Solder
 KT 34 = Half Quick Connect (0 Flat)
 KT 35 = Half Quick Connect (45 Bend)
 KT 36 = Half Quick Connect (90 Bend)
 Z = Lug Over the Side (.312)

